

**KONFIGURACJA DIALER-a
SIP NET2PHONE**


1. Ściągnij plik instalacyjny, rozpakuj i zainstaluj na komputerze.
2. Wpisz konto i pin:



The image shows a Net2Phone login dialog box. At the top, there is a blue header with the Net2Phone logo. Below the header, the text reads "Please enter your account number and PIN." There are two input fields: "Account Number:" with the value "1234567890" and "PIN:" with four dots. Below the input fields, there are two checked checkboxes: "Save my account number and PIN" and "Sign in automatically when Net2Phone Dialer starts". At the bottom, there are four buttons: "Settings...", "Help", "OK", and "Exit".

3. Wybierz Settings... i wprowadź zmiany zgodnie z rysunkiem.

Jako Secondary SIP Proxy należy wpisać: **ippbx.net2phone.com**.

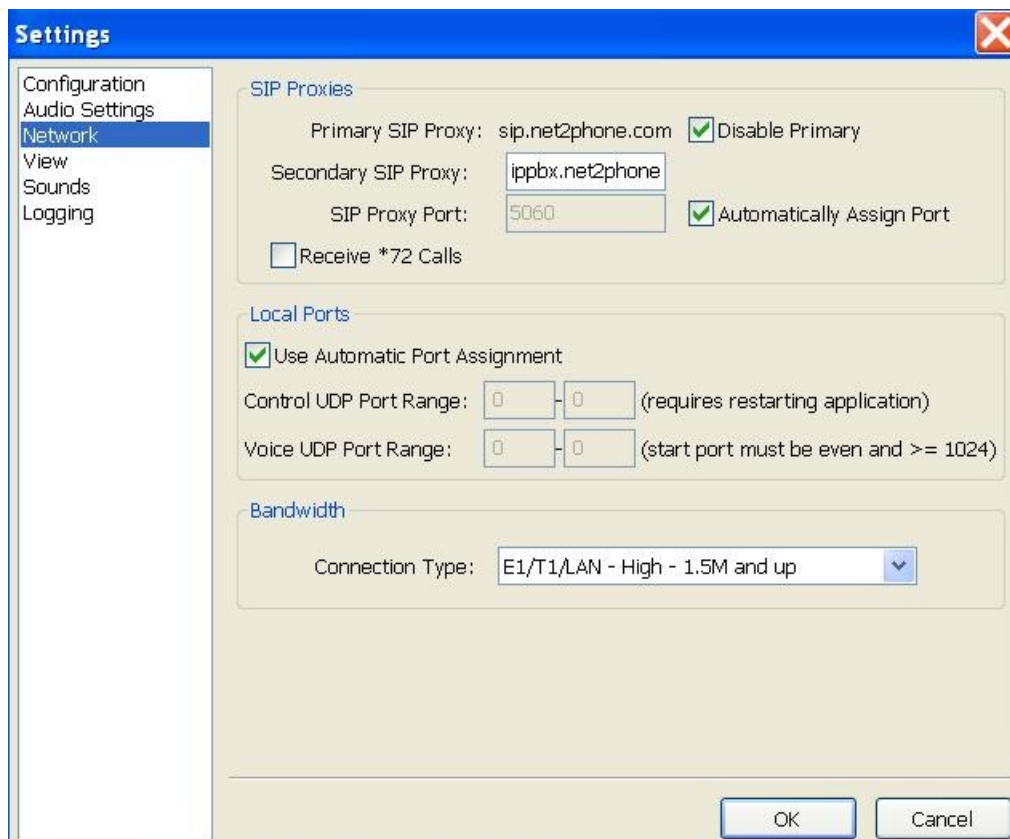

The image shows a "Settings" dialog box with a blue title bar and a red close button. On the left, there is a sidebar with a tree view containing "Configuration", "Audio Settings", "Network" (selected), "View", "Sounds", and "Logging". The main area is divided into three sections: "SIP Proxies", "Local Ports", and "Bandwidth".
- **SIP Proxies:** "Primary SIP Proxy:" is "sip.net2phone.com" with a checked "Disable Primary" checkbox. "Secondary SIP Proxy:" is "ippbx.net2phone". "SIP Proxy Port:" is "5060" with a checked "Automatically Assign Port" checkbox. There is an unchecked "Receive *72 Calls" checkbox.
- **Local Ports:** "Use Automatic Port Assignment" is checked. "Control UDP Port Range:" has two empty input boxes with "(requires restarting application)" to the right. "Voice UDP Port Range:" has two empty input boxes with "(start port must be even and >= 1024)" to the right.
- **Bandwidth:** "Connection Type:" is a dropdown menu showing "E1/T1/LAN - High - 1.5M and up".
At the bottom right, there are "OK" and "Cancel" buttons.

4. Zatwierdź zmiany.
5. Podłącz słuchawki i mikrofon lub inne urządzenia multimedialne zapewniające komunikację głosową.
6. Wybieranie numeru.

Pierwsze okienko musi być puste.

W drugim należy wpisywać numer jak w TP SA –

nr krajowy 0_kod-miasta_numer

nr zagraniczny 00_kod-państwa_numer.



7. Zarządzanie kontem.

Na stronie www.myaccountcenter.net znajduje się biling oraz różne opcje, które można ustawiać zgodnie z własnymi wymaganiami i potrzebami.